


BarBerCut Lite Y-Rail Motor and Sprocket Removal


1. Remove 4 screws holding Y-Rail in place.




2. Remove 4 screws holding scissor assembly in place.

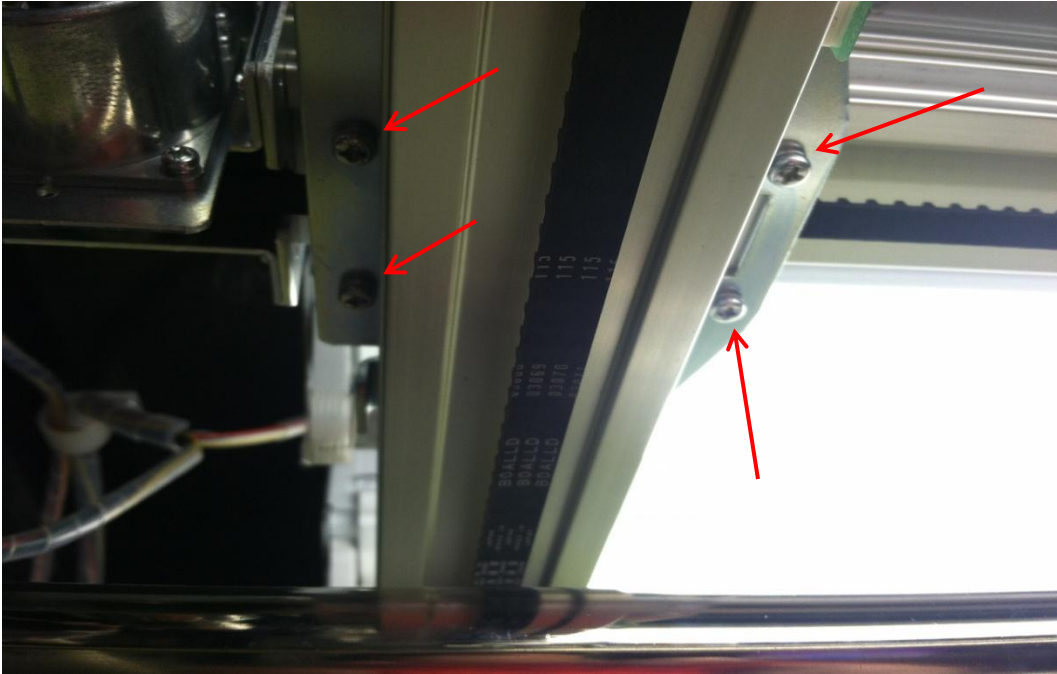


3. Loosen 4 screws holding belt in place.

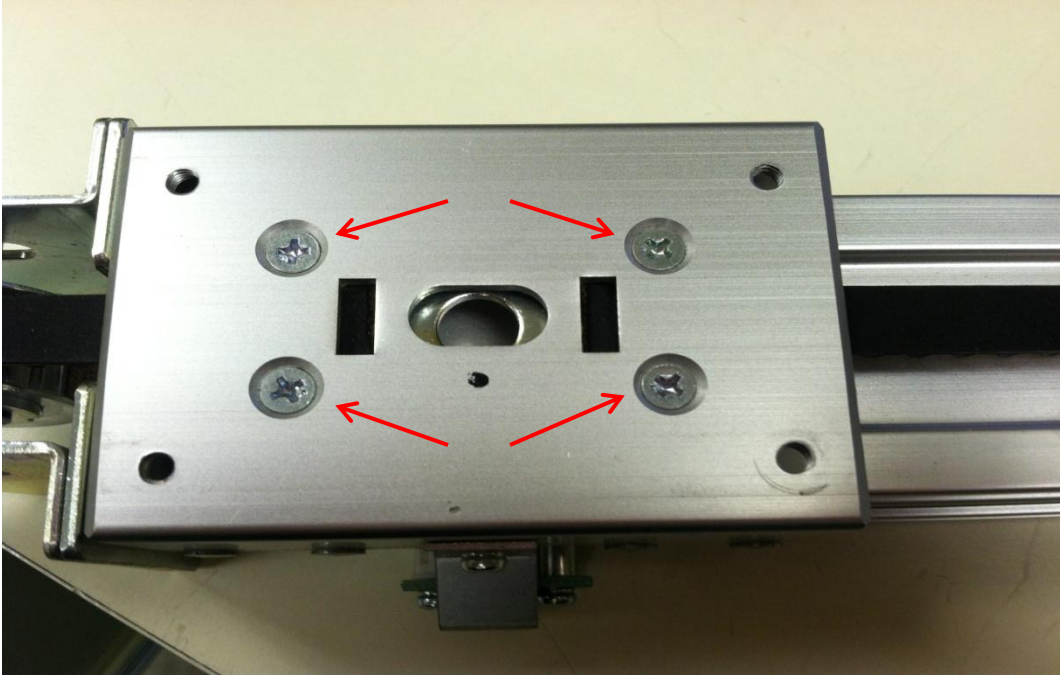

4. Loosen "Set Screw" on sprocket carefully with "2mm Allen Wrench" making sure not to strip screw.

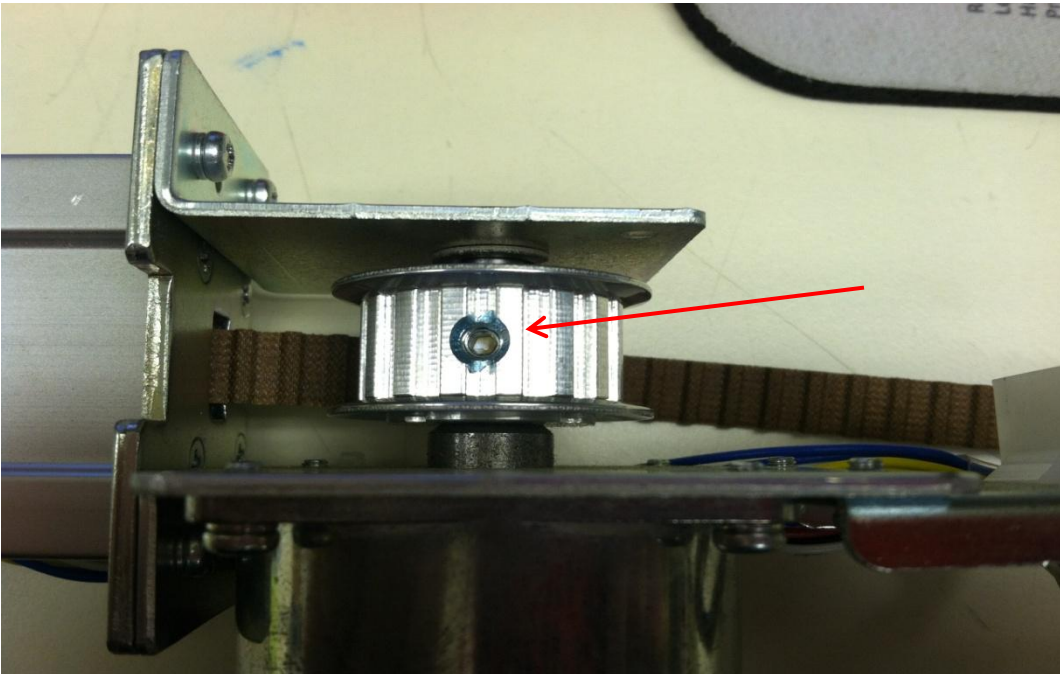

5. Remove 4 screws holding motor in place and motor should slide right out.

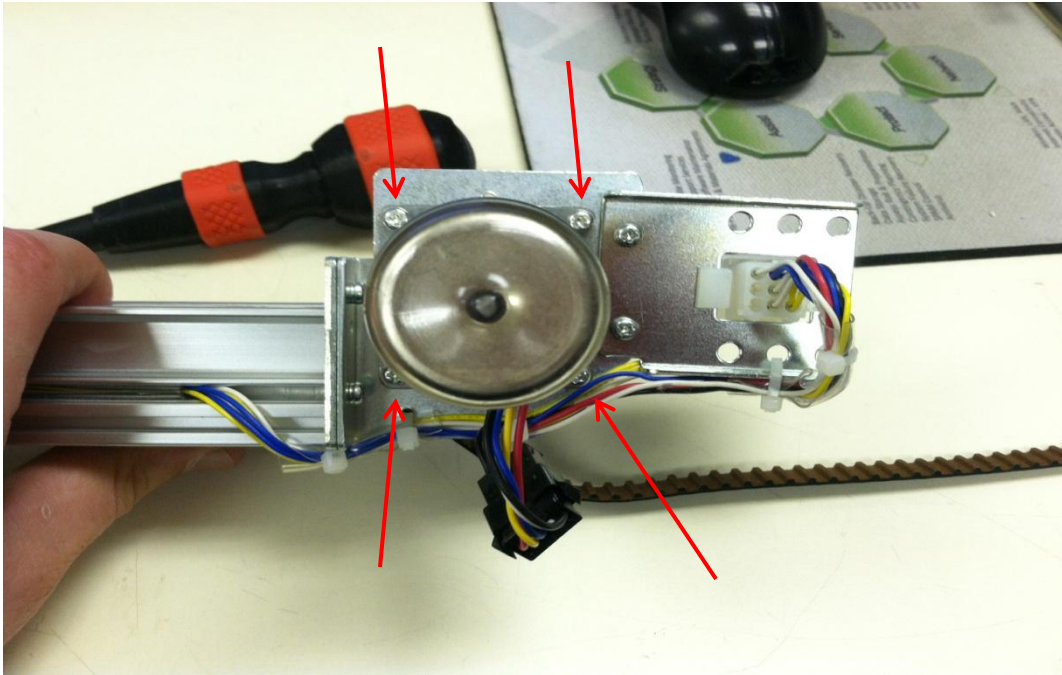

6. If “Set Screw” is too hard to loosen on sprocket and think it might be easier to get out with motor assembly off the Y-Rail, remove 2 screws holding motor assembly in place. Unscrew 1 screw with Phillips Head screwdriver and the other with long needle nose pliers.

