

# Barber Cut

## Scissor Unit Update

- Step 1.** Disconnect the cable from the side of the scissor unit ( photo A )



Disconnect cable

Remove the 4 screws  
Don't let the scissor unit drop!

- Step 2.** Remove the scissor unit from the X-Y unit by removing the 4 screws on top. (photo B)




- Step 3.** After removing the cutting unit from the game place it on a work bench so that the blade holders can be changed

- Step 4.** Remove the white plastic part from the right side of the cutter. Install the new part labeled "Blade Holder D". (photo C)




Remove and replace with  
Blade Holder D

- Step 5.** Remove the white plastic and blade from the left side. (photo D)

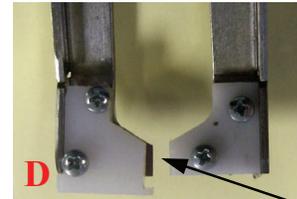


CAUTION: Blade is sharp!

- Step 6.** Place blade into new "Blade Holder C" Make sure the blade is completely in the channel of the blade holder. Secure the blade with scotch tape. (photo E)

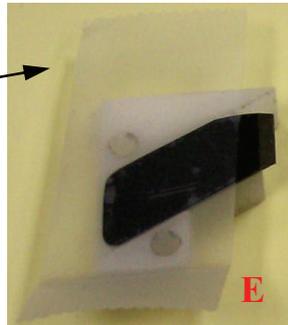

The blade should be 0.5 mm (0.19" )  
past the holder.

- Step 7.** Install Bladed Holder and Blade back onto the scissors. After Blade is installed trim off all visible tape. (photo F)

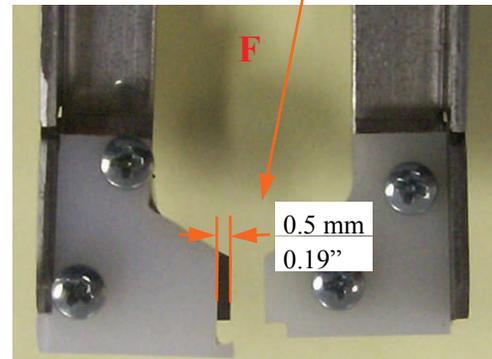

String Deflector Plate

Mounting Bracket

- Step 8.** Install Scissor Unit back onto the X-Y mech. The new String Deflector Plate is on top of the mounting bracket and the Scissor Unit is hung from underneath the bracket. Use the screws and washer provided with the kit. (photo G)

- Step 9.** Using the wire ties supplied; attached cable as shown.

Cable ties



## Bottom Pipe Update

# Barber Cut

**Step 1. Remove strings from Upper Pipes and from clips of lower pipes**

From Left Side of Cabinet


**Step 2. Remove Screw**

**Step 3. Remove 3 screws holding the "Donut"**

**Step 4. Wiggle the Pipe out of the right "Donut"**

**Step 5. Repeat the process and remove the back Pipe**

**Step 6. Install the new Back Pipe**

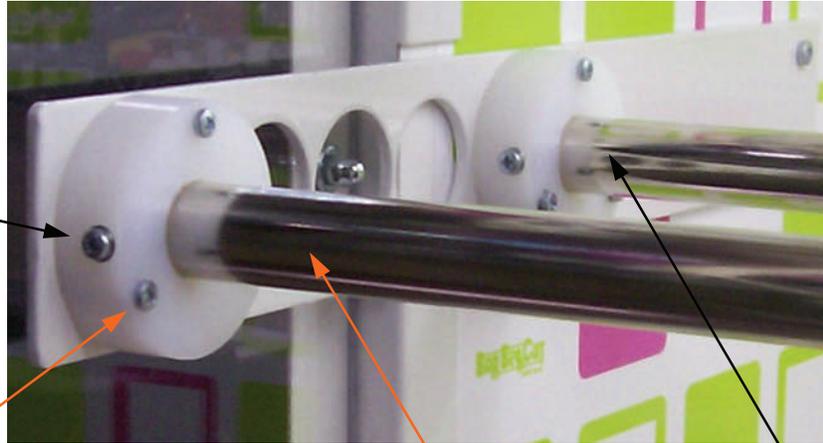

Front Pipe

Back Pipe

If the Pipe doesn't wiggle out of the right Donut the 3 screws holding the right side Donut will need to be removed



**Step 7. Push left Donut over Pipe**

**Step 8. Wiggle the right end of the Pipe into the right Donut**

**Step 9. Mount the left Donut to the bracket with the 3 screws**

**Step 10. Install the screw holding the Pipe making sure the clamps are towards the front**

**Step 11. Repeat the process for the front Pipe**

**Step 12. Run the strings with the prizes up through the clamps**

